

Customer:


Date:

- (15) A34
- 2x New Fascia/Custom.

#9-52

Attach to Fascia  
New 2x6 @ 9ft

Wall 29' 2"

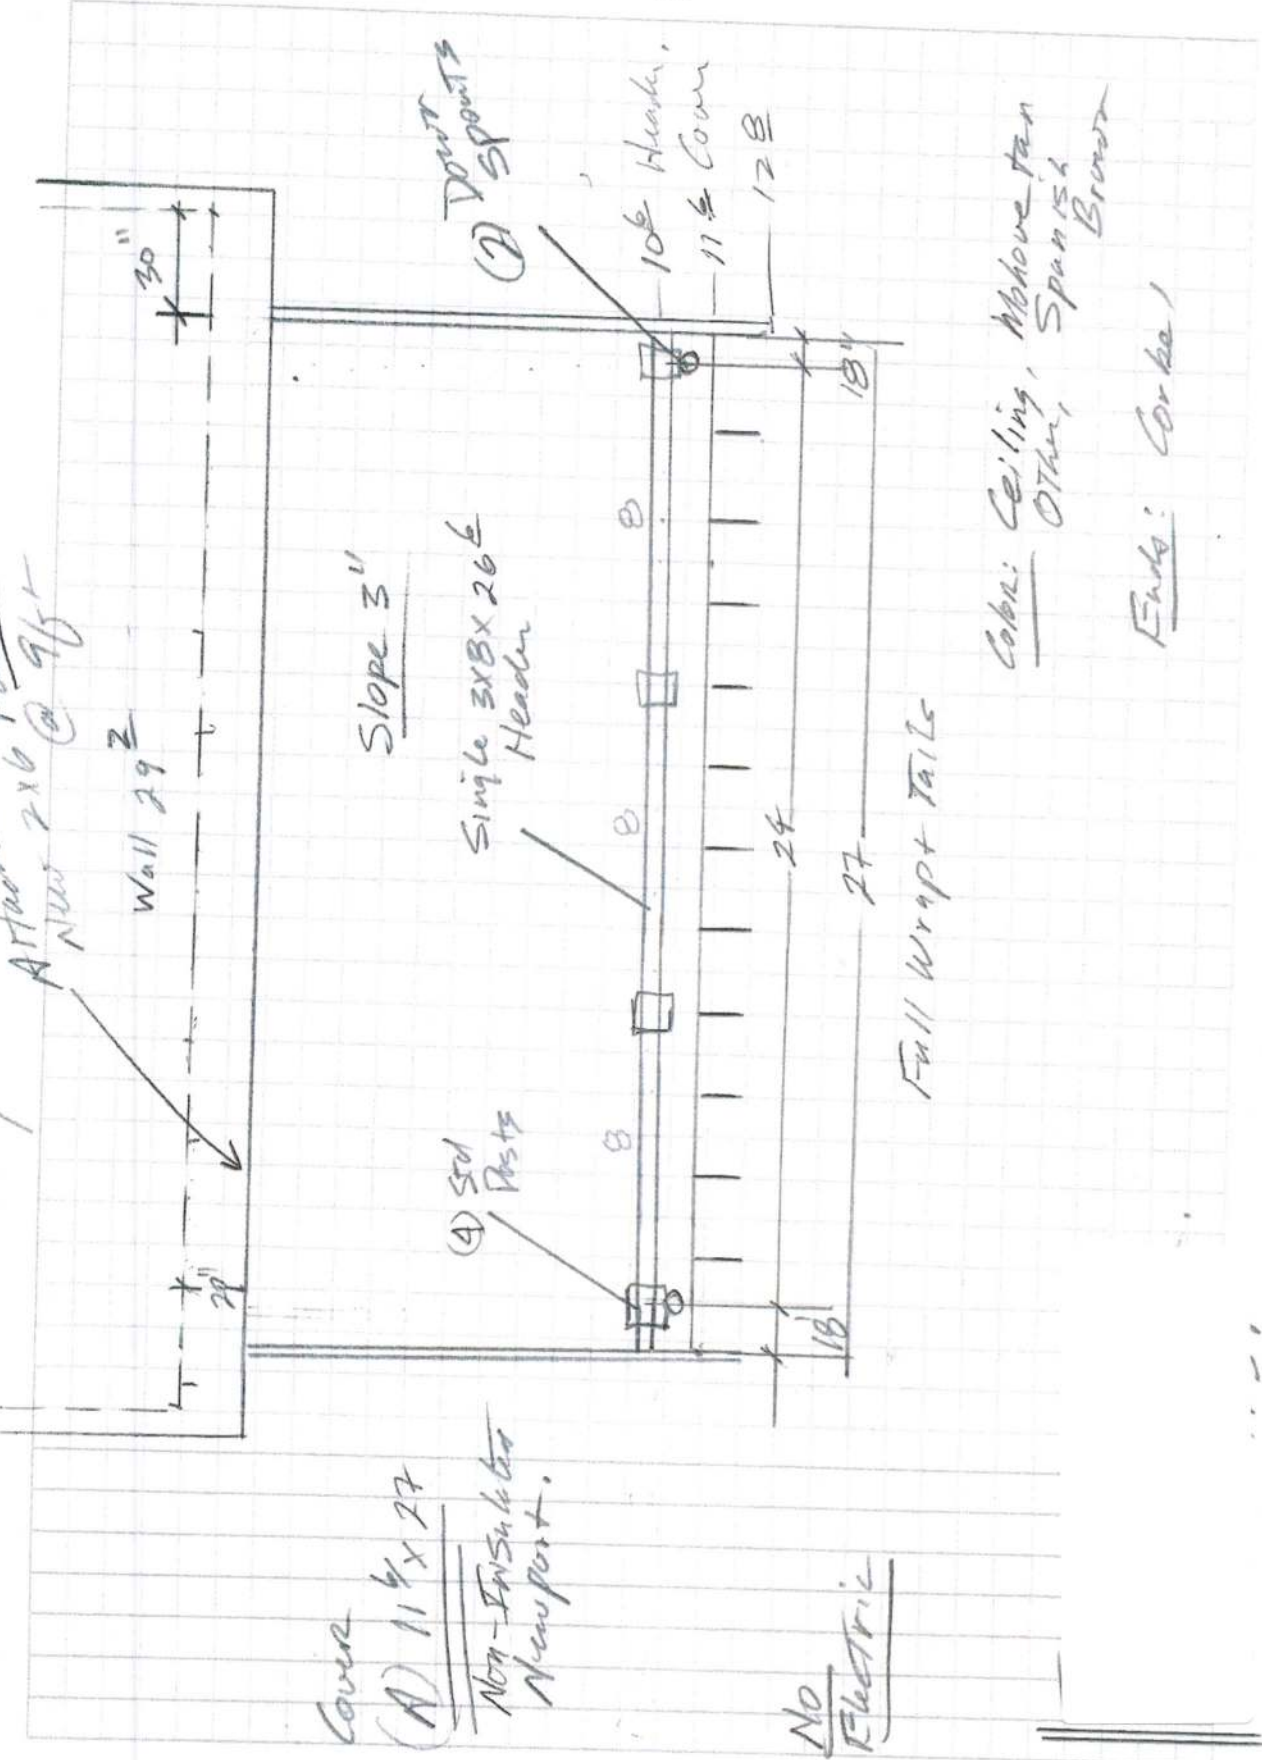

Slope 3"

Single 3x8x26  
Header

(4) Std Posts

Cover  
(A) 11 1/2 x 27

NOY-INSULATED  
Newport.

NO  
Electric

(2) Down  
SPROUTS

10" Header,  
11 1/2" Cover  
12" B

Full Wrap Tails

Cover: Ceiling, Mohave tan  
Other, Spanish  
Brown


Ends: Corker

(A)

Customer:

Date:

#9-52

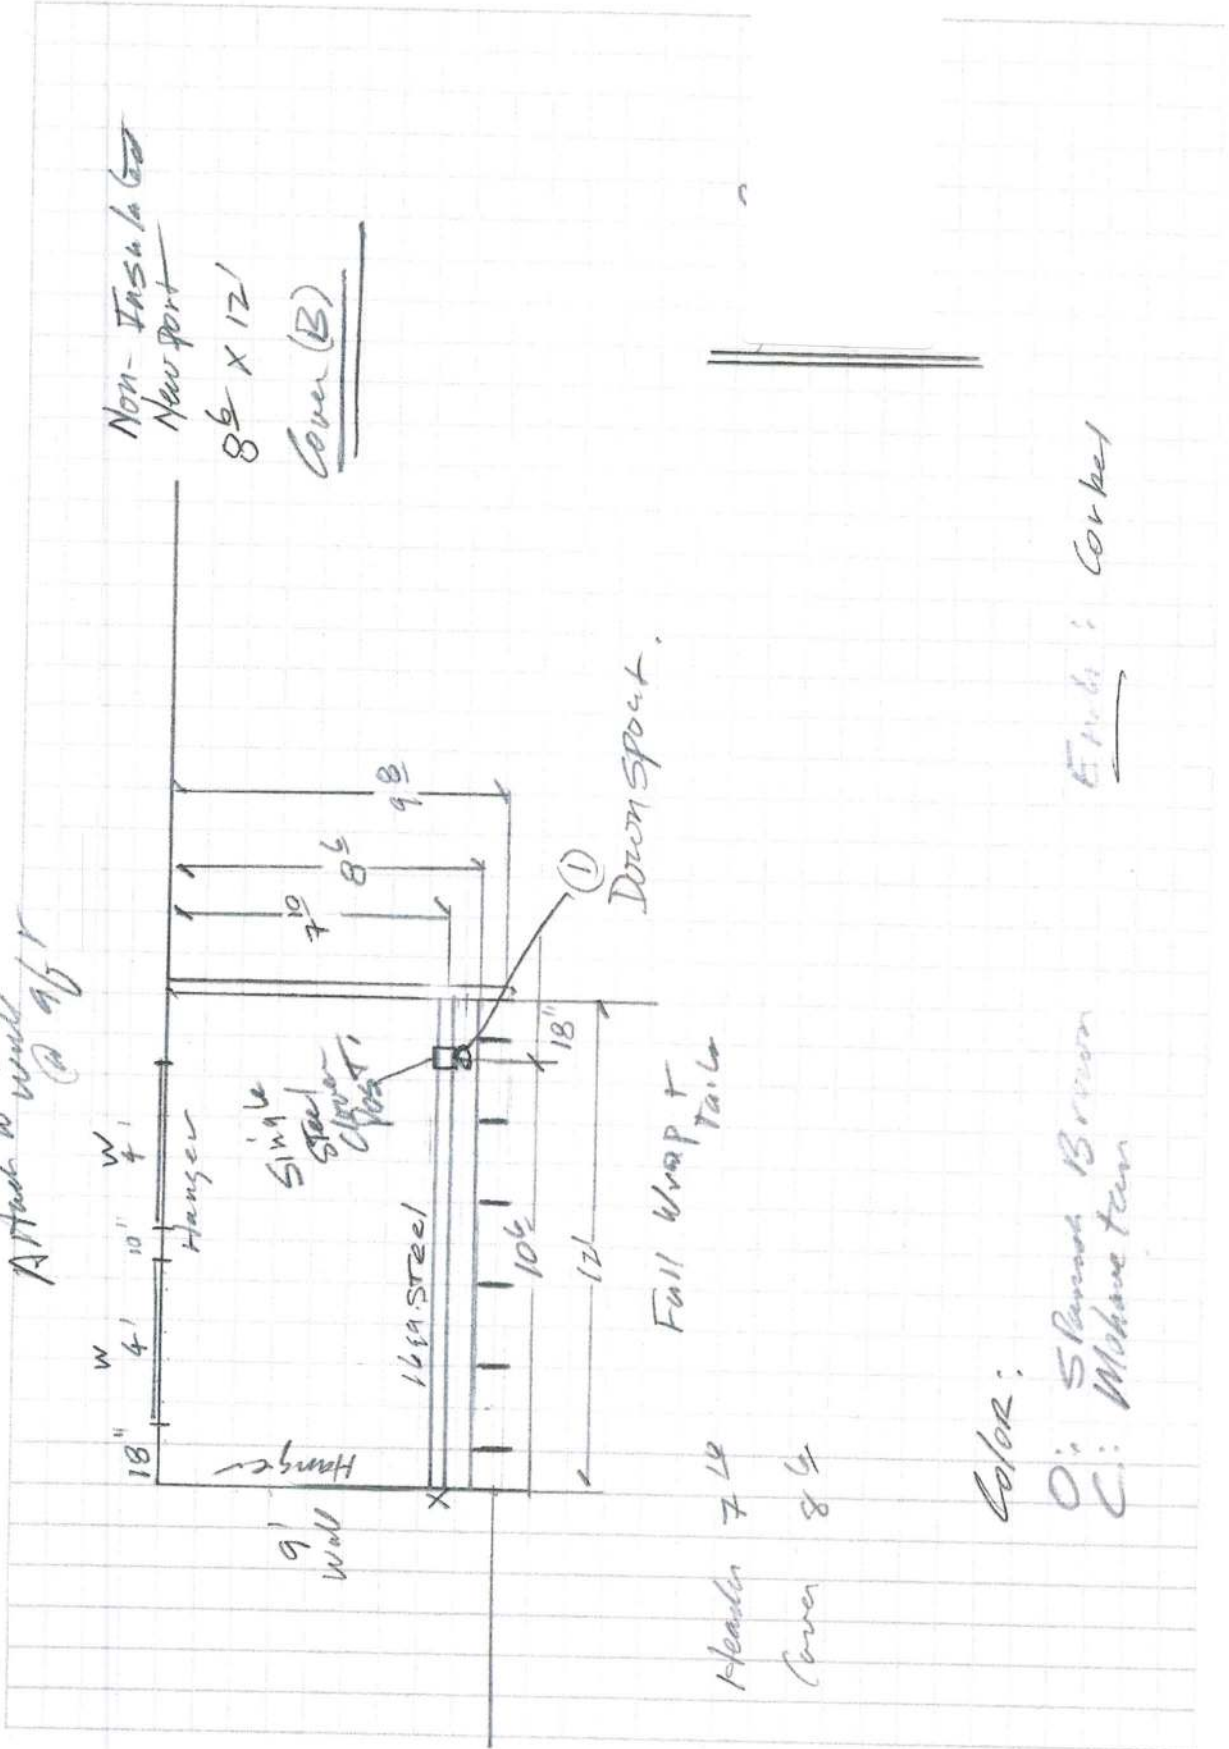

(B)

To:

E-mail:

3

Quote Two Covers:

(A) Description: Attached, Amerimax Solid Non-insulated Newport Patio Cover. 11 1/2 ft. proj. (12 ft. 8 in. w/Wrap and Tails) x 27 ft. wide. Single 3x8x26 1/2 Header. Includes gutter and (2) downspouts. Four (4) Std. Alumawood posts 8 ft. o.c. on existing concrete slab and approx. 10 1/2 ft. from fascia/hanger. Approx. 12" front and 18" Side Overhangs. Attach hanger to New 2x8 Fascia at approx. 9 ft. height.

Total sq. ft. - 311 = \$3,575.00 Material (.024 HD gauge)  
 - 930.00 Labor  
 \$4,505.00 Total

(B) Description: Attached, Amerimax Solid Non-insulated Newport Patio Cover. 8 1/2 ft. proj. (9 ft. 8 in. w/Wrap and Tails) x 12 ft. wide. Single 3x8x11 1/2 Header w/ 16ga. Steel 'C' insert. Includes gutter and (1) downspout. One (1) Steel Clover post. 8 ft. on existing concrete slab and approx. 7ft. 10 in. from wall/hanger. Approx. 8" front and 18" Side Overhangs. Attach hanger to stucco wall at approx. 9 ft. height.

Total sq. ft. - 102 = \$1325.00 Material (.024 HD gauge)  
 - 660.00 Labor  
 200.00 Steel 'C' insert, 16ga. 20ft. (cut)  
 - 40.00 Steel 'C' labor  
 75.00 3x3x9ft. Steel Clover post  
 \$2,300.00 Total

Total Two Covers: \$6805.00

Notes: 1) Slope covers min. 1/4"/ft. (3 inches)

3) No electrical

Material: # 5175.00  
 Labor: # 1630.00