


Color: All White
 Ends: Bevel

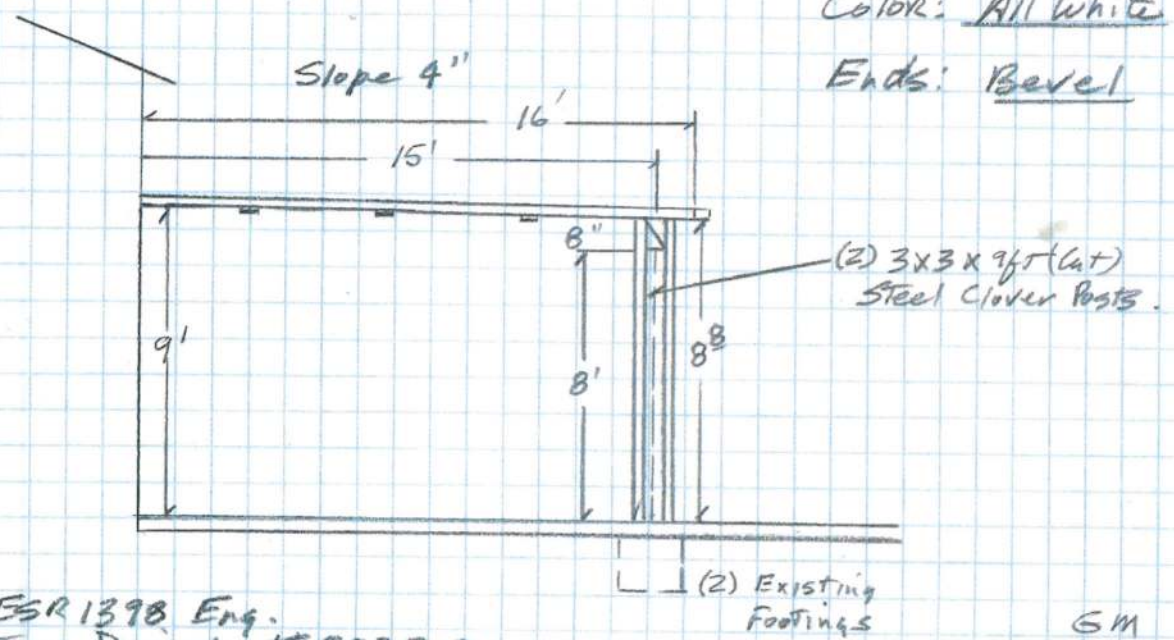

ICC ESR 1398, Eng.
 Factory Direct #883800

12-7-10
 Rev 2

GM
 Fac. Div.
 3/16

December 7, 2019 Rev. 5 (Non-Insulated Newport)
 Page 1 of 2

To:

E-mail: nadeau1@pacbell.net

Quote:

Description: Attached, Amerimax, Non-Insulated Newport Patio Cover 16 ft. proj. (w/Full Wrap and Short 1in. Ends Only) x 16ft. wide. Includes gutter and downspout. Two (2) Steel Clover posts approx. 14ft. 8in. o.c. onto existing footings. 8 in. Side and 12in. Front Overhangs. Single 3x8x16 ft. header w/12 ga. steel insert. Attach hanger to stucco wall at approx. 9 ft. height.

Total sq. ft. -	256	= \$3,070.00	Material (HD .032 gauge)
	-	765.00	Labor
		160.00	Two (2) Steel Clover posts
		240.00	(1) Steel 'C' header insert, 12ga. 20ft. (cut)
	-	40.00	Steel 'C' labor
		360.00	(9) 4in. Recessed LED's
	-	270.00	(9) Wire runs for LED's
	-	90.00	LED labor.
	-	45.00	(3) 16ft pan caps installed - <i>labor</i>
	-	40.00	(1) Wire run to SE corner for customer BBQ light
		700.00	Demo and haul old wood lattice cover
		<hr/>	
		Total	\$5,780.00 (Pricing valid for 60 days)

Mat'l: \$3330.00
Labor: \$1250.00
Demo: \$700.00

Notes: 1) Slope min. ¼ "/ft. (4 inches)

- 3) Customer responsible for set-backs
- 4) ICC ESR1398 Engineering
- 5) Cover slopes under side roof overhang.

Warranty – Material - Limited Lifetime from Manufacturer, Amerimax
 Labor and Workmanship – 10 years