

Attach to Stucco Wall @ 10' (over vent)

Extra 4' Hanger
4' Wall

Wire out VENT

Wire out above Light RT or Left.

1x Wood insert

10" x 10" Rom. Col.

1x Wood insert

(2) 4" Recessed LED's

(3) Panels w/ beams + wire

Mitered Corners (No Ends)

No Tails 17'

Mitered Corner

(2) 10" x 10" Round, Smooth Roman Cols.

24" 20' Cover Double 21' Headers


Double 3x8x21' Headers One w/ 1/2" Steel insert

Amerimax Solid 3" Ins. Maxx Panel Patio Cover 10ft proj x 20ft wide

Slope 3" 10' 9'

Color: All White

Ends: Corbel

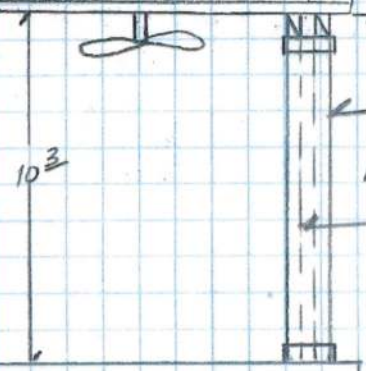

(2) 10" x 10" Rd, Smooth Roman Cols.

(2) 3x3x10' Steel cover Posts

Factory Director
Patio Covers
Lic # 883800

ICCESR1398
Engineering

GM
Fac. Dir

3/16

Factory Direct Patio Covers Lic. # 883800 Project #9-83

December 3, 2019 Rev. 2

Page 1 of 2

To:

E-mail: _____

Quote:

Amerimax, Alumawood, Solid, 3 in. Insulated Maxx Panel Patio Cover, two-post design, 10 ft. proj. (w/Full Wrap, Mitered Corners and No Tails) x 20 ft. wide. Double 3x8x21 ft. Headers w/12ga. Steel 'C' insert. Two (2) HD 3x3-10ft. Steel Clover posts. Posts at approx. 9 ft. from wall/hanger and approx. 16 1/2 ft. o.c. Approx. 21 in. side and 12 in. front overhangs. Height to hanger on stucco wall approx. 10 ft. 3in. over vent. Slope cover 3 in. Gutter with scuppers included.

Total sq. ft. - 200	= \$2,800.00 Material (3in. Insulated Maxx Panel)
	- 800.00 Labor
	200.00 Extra 3x8x20 Header (Double header)
	250.00 Steel 'C' header insert, 12ga. 20ft.
	- 50.00 Steel 'C' labor
	110.00 HD Peel and Seal Seam tape. w/labor
	150.00 (2) HD 3x3x-10ft. Steel Clover posts
	780.00 (2) 10in.x10ft. Round, Smooth Roman Columns.
	100.00 Roman Column(s) labor
	150.00 Roman Column Painting (2)
	450.00 (3) Fan/light beams w/wire to house
	00.00 4ft. Extra side hanger
	- 30.00 (2) 1x Side inserts for Drop Covers
	120.00 (2) 4in. Recessed LED's w/labor
	<hr/>
	\$5,990.00 Total (Price valid for 60 days)

60M
50L -

300M
150L ✓

80M
40L ✓

Mat'l: \$ 4,620.00
Labor: \$ 1,370.00

Notes: 1) Elec. fixtures & connections by customer. 4in. Recessed LED's installed by Factory Direct.